








SMT COMMON MODE INDUCTORS

0.5A to 3.6A



-  Maximum Reflow Temperature: +235°C
-  Storage Temperature: -55°C to +125°C
-  Moisture Sensitivity Level (MSL): 3
-  Pick and place compatible
-  Rated voltage 250V_{AC}
-  Low RFI toroid
-  Tape & Reel packaging available

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C⁵





Part Number	Inductance (mH±30%)	Rated (A)	Leakage Inductance (μH MAX)	DCR (MAX) (mΩ)	SRF (MHz)	Impedance Curve	Weight (Grams)	Quantity in Tube
X-1568	3.00	2.5	9.297	80	2.2	#3	8.3	30
PL1382	1.00	3.6	3.166	50	4	#1	8.5	30

NOTES: 1. Leakage Inductance tested at 100kHz, 1140 mV, (1-2) with (3-4) shorted.
 2. Add suffix "T" to part number for Tape & Reel package
 3. To order a RoHS compliant part, add the suffix "NL" to the part number, i.e. X-1568 becomes X-1568NL.


Mechanical

Schematic

X-1568

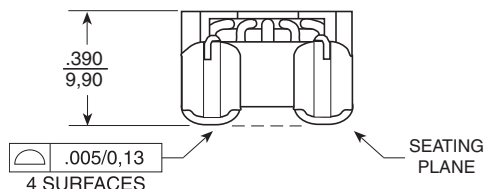

Impedance Curves

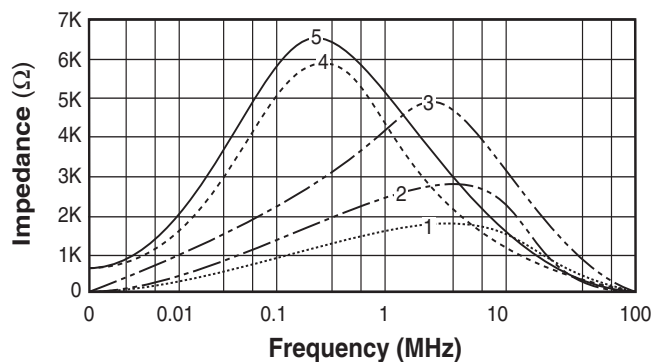

Part hardened for aerospace use.

SMT COMMON MODE INDUCTORS

0.5A to 3.6A



For More Information:

Pulse Worldwide Headquarters	Pulse Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
Two Pearl Buck Court Bristol, PA 19007 U.S.A.	Einsteinstrasse 1 D-71083 Herrenberg Germany	B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Rd. High-Tech Zone Nanshan District Shenzen, PR China 518057	Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Rd. West Shanghai 200336 China	135 Joo Seng Rd. #03-02 PM Industrial Bldg. Singapore 368363	No. 26, Kao Ching Rd. Yang Mei Chen Taoyuan Hsien Taiwan R. O. C.
www.pulseeng.com					
Tel: 215 781 6400 Fax: 215 781 6403	Tel: 49 7032 7806 0 Fax: 49 7032 7806 135	Tel: 86 755 33966678 Fax: 86 755 33966700	Tel: 86 21 62787060 Fax: 86 2162786973	Tel: 65 6287 8998 Fax: 65 6280 0080	Tel: 886 3 4643715 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.
© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.