
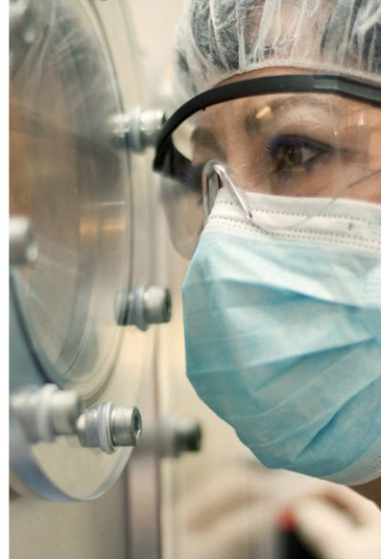


Acktar


Advanced Coatings



www.acktar.com

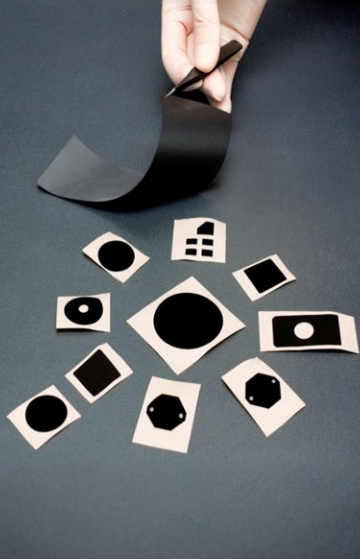

Acktar Black Thin Films and Foils

HI-TECH ON THE SURFACE

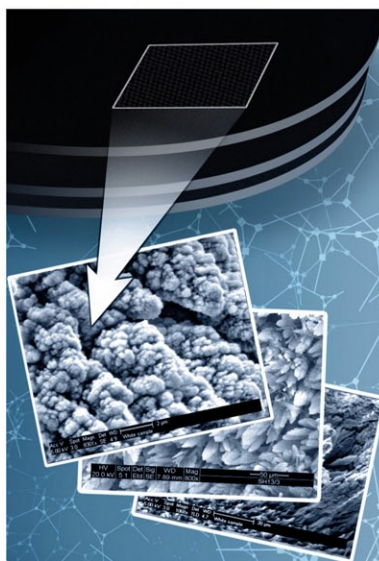


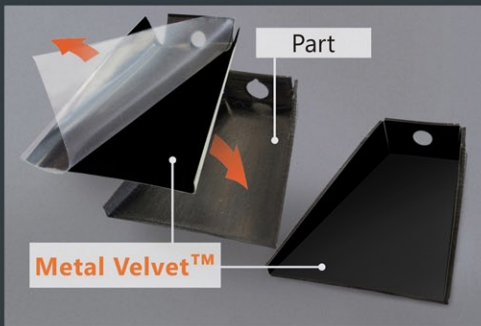






Main Features

- Broadband optical performance
- Broad operational temperature range
- Clean room compatible (ISO 5)
- Low outgassing: CVCM < 0.001
- Biocompatible: no cytotoxicity
- High laser damage threshold (LIDT)
- Cleanable
- Preform to customer design
- Suitable for flat, concave or convex surfaces
- Standard, low-outgassing and high-temperature adhesive options

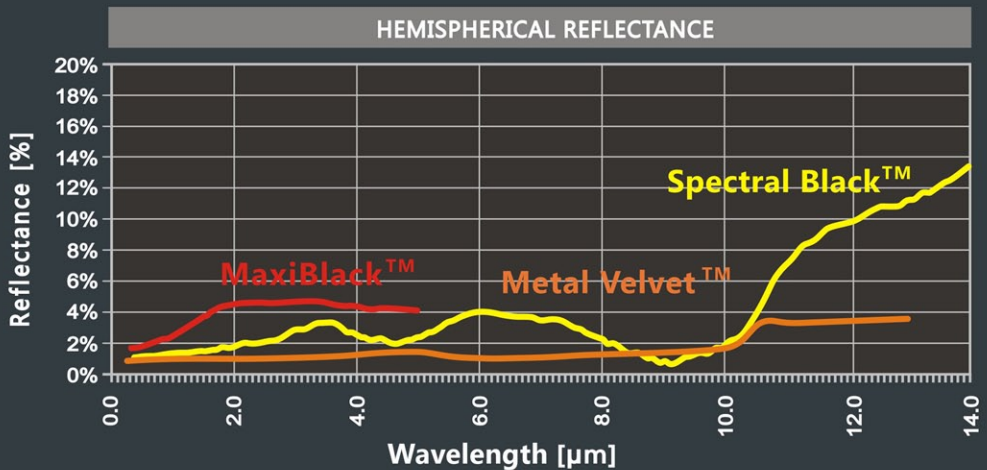Typical Applications

- Optical system housings
- Apertures and baffles
- Beam dumps
- Laser safety screens
- Mobile phone camera parts
- Automotive – cameras and HUDs
- Calibration standards
- Analytical lab arrays
- Space qualified option is available



Parameter	Metal Velvet™ Ultra Diffusive	Spectral Black™ Semi-Specular	MaxiBlack™ Diffusive Polyimide	
Sample				
Wavelength	EUV-FIR		UV-SWIR	
	To be removed after application			
	Black Coating	5-8 µm	3-7 µm	2-3µm
	Substrate	115 µm Aluminum	125 µm Aluminum	75 µm (custom available) Polyimide
	Adhesive	60 µm		30 µm / 60 µm

Coating chemical content	Completely inorganic – metal based		
Coating outgassing CVCm	0.001 (%)		
Humidity resistance	MIL-C- 48497A		
Abrasion resistance	Light	Moderate	Moderate
	Working Temperatures		
Without adhesive	Long term: -250°C + 350°C (-320°F to +662°F) Short term: up to +400°C (+752°F)		Long term: -250°C to +290°C Short term: up to +400°C
With standard adhesive	Long term: -40°C to +121°C (-40°F to +250°F) Short term: up to +177°C (+351°F)		
With low outgassing adhesive	Long term -50°C to +150°C (-58°F to +302°F) Short term: up to +260°C (+500°F)		
	Delivery Formats		
Sheet	20x30 cm / 20x60 cm		
Roll	20/30 cm width, any length	20 cm width, any length	20/30 cm width, any length
Adhesive	Optional		
Die-cut (pre-cut)	Supplied as tight-tolerance cut to shape labels according to drawing		
Certificates	ROHS, REACH, ISO 9001:2015, AS9100		
	Storage and Shelf Life		
Storage conditions	Indoors (temperature approx. 21°C; RH approx. 50%)		
Standard shelf life	For best performance, apply adhesive and remove protective within 12 months of shipment		
Cleanability	Compressed dry air or nitrogen		

■ Acktar is a world leader in the development and production of high emissivity Ultra Black coatings for the suppression of stray light throughout the optical spectrum UV-VIS-IR. With the ability to coat most substrates, plastic, glass, ceramics and metals to custom 3D opto-mechanical parts, Acktar is considered a standard of excellence in the field. The coatings are space-qualified, inorganic, thin, RoHS & REACH compliant, biocompatible, low outgassing and more.

■ Acktar offers pre coated opto-mechanical parts such as, apertures, slits, beam dumps and Hexa Black designed uniquely for grazing angles.

■ Acktar's coated foils and thin films enable the customer to benefit from Acktar coatings performance without sending the parts to Acktar. This is an ideal solution for very large quantities, over-sized part areas and for contaminated environments where the light absorbing surface needs to be periodically renewed.

We are proud to serve major industries including:

- Space Optics and Satellites
- Security & Defense
- Metrology and Inspection
- Mobile Optics and Micro-Optics
- Automotive
- Bio

Headquarters

Acktar Ltd.
19 Topaz St.,
P.O.B. 8643;
Kiryat-Gat 8213513, Israel
Tel: +972-8-6814213
Fax: +972-8-6810198
E-mail : info@acktar.com
www.acktar.com

Germany

ACM Coatings GmbH
Rudelsburgpromenade 20 c
06628
Naumburg - Bad Koesen
Tel: +49-34463-621340
Fax: +49-34463-621349
E-mail: germany@acktar.com
de.acktar.com

Japan

Acktar Japan
2nd FL., Tanizawa Bldg.,
17,1-Chome, Kanda Nishiki-Cho,
Chiyoda-Ku, Tokyo
Japan #101-0054
Tel: +81-3-5283-7311
Fax: +81-3-3219-1250
E-mail: japan@acktar.com
jp.acktar.com

France

OPTOPRIM
21-23 rue Aristide Briand
92170 Vanves - FRANCE
Tel.: +33(0)1-41-90-61-80
E-mail: france@acktar.com
fr.acktar.com

USA

696 San Ramon Valley Blvd. #334
Danville, CA 94526
Tel.: +1-510-453-7004
Fax: +1-925-886-8833
E-mail: usa@acktar.com



www.edmundoptics.com

The information on this product is based on data obtained by our research and is considered accurate. However, no warranty is expressed or implied regarding the accuracy of these data and the results obtained from the use thereof. This information is furnished upon the condition that the recipient shall conduct tests to determine the suitability of the product for their particular application.