


SPECIFICATION BULLETIN **MR208-5 MIXER (QIFM)**
RF/LO: 14 to 18 GHz IF: DC to 100 MHz

FEATURES

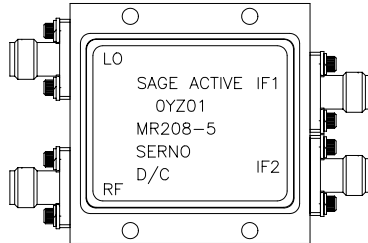

- Field Replaceable SMA Connectors
- Suitable for Stripline Integration
- Quadrature Phase $\pm 5^\circ$ Typical
- Amplitude Balance $\pm .6$ dB Typical
- VSWR 1.5:1 Typical
- Available as a hermetic product

SPECIFICATIONS	TYPICAL	Min.	Max.
RF/LO Frequency Range	---	14 GHz	18 GHz
IF Frequency Range (3 dB Bandwidth)	---	DC	100 MHz
Conversion Loss	11 dB	---	13 dB
Quadrature Phase Balance	$\pm 5^\circ$	---	$\pm 15^\circ$
Amplitude Balance	$\pm .6$ dB	---	± 1.5 dB
DC Offset	± 4 mV	---	± 15 mV
LO Drive Level	13 dBm	12 dBm	14 dBm
Isolation, LO to RF	30 dB	20 dB	---
LO to IF	22 dB	15 dB	---
VSWR, RF	2.2:1	---	2.5:1
LO	1.4:1	---	2.0:1
Input 1 dB Compression (Input)	6 dBm	2 dBm	---
Input Two-Tone Third Order IP) IP3	13 dBm	10 dBm	---
Operating Temperature Range ($^\circ\text{C}$)	---	-40	+85
Storage Temperature Range ($^\circ\text{C}$)	---	-65	+125

Detail Outline Drawing Information: Active Microwave Drawing # 11208

OUTLINE DRAWING

