

CT 79 SMD

CT 79E SMD



Wet tantalum capacitors
Hermetically sealed tantalum cases
for surface mount SMD
 Axial leads
 Polarized types

ELECTRICAL AND CLIMATIC CHARACTERISTICS

	CT 79 SMD	CT 79E SMD
Detail specification	CECC 30202-001	CECC 30202-001
	CECC 30202-005	CECC 30202-005
	CECC 30202-801	CECC 30202-801
	ESCC 3003-005	ESCC 3003-005
Operating temperature	-55°C +125°C	-55°C +125°C
Damp heat	56 days	56 days
Capacitance range	1,7µF...1200 µF	5,6µF...2200 µF
Tolerance	20%...10%	20%...10%
Voltage range	6V...125V	6V...125V
Max. capacitance change -55°C	see table	see table
Max. capacitance change +85°C	see table	see table
Max. capacitance change +125°C	see table	see table
Maximum DF at +20°C	see table	see table
Maximum DF at +85°C	= lim20°C	= lim20°C
Maximum DF at +125°C	= lim20°C	= lim20°C
Max. impedance (100 Hz) at -55°C	see table	see table
Max. leakage current at +20°C	see table	see table
Max. leakage current at +85°C	see table	see table
Max. leakage current at +125°C	= lim+85°C	= lim+85°C
Max. ripple current 40 kHz +85°C	see table	see table
Max. reverse voltage at +20°C	3 volts	3 volts
Max. reverse voltage at +85°C	3 volts	3 volts
Max. reverse voltage at +125°C	3 volts	3 volts
Max. surge voltage at +85°C	1,15 x U _R	1,15 x U _R
Max. surge voltage at +125°C	1,15 x U _C	1,15 x U _C


DIMENSIONS (mm)

Case code	B max	F max	H max	E ±0,4	C max	G max	Ø max
A	13,5	4,0	4,8	3,8	7,5	2,0	5,8
B	18,5	4,0	5,9	5,3	9,5	2,0	7,4
C	21,5	4,0	7,5	8,4	12,5	2,0	10,1
D	29,5	4,0	7,5	8,4	12,5	2,0	10,1

MARKING, PACKAGING, CONSTRUCTION:
 see general characteristics

HOW TO ORDER

Commercial reference	Model	Case	Capacitance in µF	Tolerance in %	DC Voltage	Termination (RoHS)
	CT79SMD CT79ESMD	D	300µF	20%	20V	H
Exxelia Tantalum PN	Model code	Case	Capacitance code	Tolerance code	DC Voltage code	Termination (RoHS)
	TS7B TS78E	D	307	M	020	A
		See Ratings and Case code table	Expressed in pF with 3 digits: 2 digits for the value and the third for the multiplier	K = 10% M = 20%	Expressed in volt with 3 digits	Commercial reference H = SnPb (No RoHS) - = Sn100% (RoHS) Exxelia Tantalum PN A = SnPb (No RoHS) F = Sn100% (RoHS)

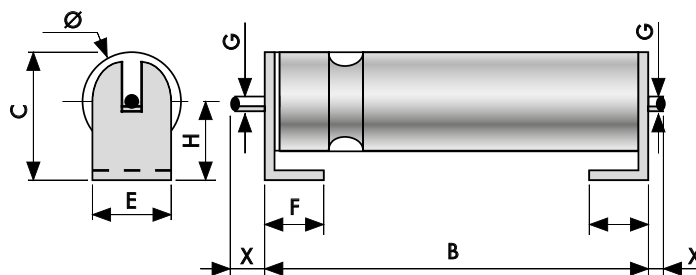

(Standard range)

CT 79 - CT 79 SMD

STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100 Hz +20°C (μF)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance +20°C (Ω)	Max. I leak		Irms Max. 40 kHz +85°C (mA)	
			−55°C (%)	+85°C (%)	+125°C (%)			+20°C (μA)	+85°C (μA)		
Rated voltage (+85°C) 6 V - 6,3 V - Category voltage (+125°C) 4 V											
30	A	CT79	CT79 SMD	−40	+10	+12	9	100	1	2	820
68	A	CT79	CT79 SMD	−40	+14	+16	15	60	1	2	960
140	B	CT79	CT79 SMD	−40	+14	+16	21	40	1	3	1200
220	B	CT79	CT79 SMD	−44	+16	+18	36	30	1	6,5	1370
270	B	CT79	CT79 SMD	−44	+17	+20	41	25	1	6,5	1375
330	C	CT79	CT79 SMD	−44	+14	+16	36	20	2	7,9	1800
560	C	CT79	CT79 SMD	−64	+17,5	+20	50	25	2	13	1900
1000	D	CT79	CT79 SMD	−80	+25	+25	68	22	3	14	2388
1200	D	CT79	CT79 SMD	−80	+25	+25	86	20	3	14	2388
Rated voltage (+85°C) 8 V - Category voltage (+125°C) 5 V											
25	A	CT79	CT79 SMD	−40	+10,5	+12	7,5	100	1	2	820
56	A	CT79	CT79 SMD	−40	+14	+16	14	59	1	2	900
120	B	CT79	CT79 SMD	−44	+17,5	+20	20	50	1	2	1230
220	B	CT79	CT79 SMD	−44	+16	+18	37	30	1	7	1370
290	C	CT79	CT79 SMD	−64	+17,5	+20	34	25	2	6	1770
430	C	CT79	CT79 SMD	−64	+17,5	+20	46	25	2	14	1825
850	D	CT79	CT79 SMD	−80	+25	+25	60	22	3	16	2456
Rated voltage (+85°C) 10 V - Category voltage (+125°C) 6,3 V											
20	A	CT79	CT79 SMD	−32	+10,5	+12	6	175	1	2	820
47	A	CT79	CT79 SMD	−36	+14	+16	13	100	1	2	855
100	B	CT79	CT79 SMD	−36	+14	+16	15	60	1	4	1200
150	B	CT79	CT79 SMD	−32	+14	+16	28	45	1	7	1271
180	B	CT79	CT79 SMD	−35	+14	+16	29	40	1	7	1365
250	C	CT79	CT79 SMD	−40	+14	+16	30	30	2	10	1720
390	C	CT79	CT79 SMD	−64	+17,5	+20	44	25	2	15	1800
680	D	CT79	CT79 SMD	−80	+25	+25	42	20	3	16	2487
750	D	CT79	CT79 SMD	−80	+25	+25	50	23	3	16	2487
820	D	CT79	CT79 SMD	−80	+25	+25	53	22	3	16	2360
Rated voltage (+85°C) 15 V - 16 V - Category voltage (+125°C) 10 V											
15	A	CT79	CT79 SMD	−24	+10,5	+12	5	155	1	2	780
33	A	CT79	CT79 SMD	−28	+14	+16	10	90	1	2	820
70	B	CT79	CT79 SMD	−28	+14	+16	13	75	1	4	1150
120	B	CT79	CT79 SMD	−28	+14	+16	18	50	1	7	1450
170	C	CT79	CT79 SMD	−32	+14	+16	25	35	2	10	1480
220	C	CT79	CT79 SMD	−41	+13	+15	21	40	2	6	1490
270	C	CT79	CT79 SMD	−56	+17,5	+20	32	30	2	14	1740
330	C	CT79	CT79 SMD	−58	+18	+20	40	30	2	14	1760
470	D	CT79	CT79 SMD	−75	+25	+25	33	24	3	18	2100
540	D	CT79	CT79 SMD	−80	+25	+25	40	23	3	18	2300
560	D	CT79	CT79 SMD	−80	+25	+25	36	23	3	18	2300
Rated voltage (+85°C) 25 V - Category voltage (+125°C) 16 V											
10	A	CT79	CT79 SMD	−16	+8	+9	4	220	1	2	715
22	A	CT79	CT79 SMD	−20	+10	+12	6,6	140	1	2	825
50	B	CT79	CT79 SMD	−28	+13	+15	11	70	1	2	1130
100	B	CT79	CT79 SMD	−28	+13	+15	15	50	1	9	1435
120	C	CT79	CT79 SMD	−32	+13	+15	21	38	2	6	1450
180	C	CT79	CT79 SMD	−48	+13	+15	26	32	2	13	1700
330	D	CT79	CT79 SMD	−60	+25	+25	28	27	3	20	2000
350	D	CT79	CT79 SMD	−64	+25	+25	35	24	3	20	2246
390	D	CT79	CT79 SMD	−68	+25	+25	32	24	3	20	2025
560	D	CT79	CT79 SMD	−65	+25	+30	46	15	9	36	2040
Rated voltage (+85°C) 30 V - Category voltage (+125°C) 20 V											
8	A	CT79	CT79 SMD	−16	+8	+12	4	275	1	2	640
15	A	CT79	CT79 SMD	−20	+10	+12	5	175	1	2	780
40	B	CT79	CT79 SMD	−24	+10,5	+12	10	65	1	5	1120
68	B	CT79	CT79 SMD	−24	+13	+15	13	60	1	8	1285
100	C	CT79	CT79 SMD	−28	+10,5	+12	17	40	2	12	1477
150	C	CT79	CT79 SMD	−48	+13	+15	23	35	2	12	1525
300	D	CT79	CT79 SMD	−60	+25	+25	30	25	3	20	2100

CT 79 - CT 79 SMD

(Standard range)

STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100 Hz +20°C [μF]	Case [code]	Type	Capacitance maximum change			Max. DF +20°C [%]	Max. Impedance +20°C [Ω]	Max. I leak		Irms Max. 40 kHz +85°C [mA]	
			−55°C [%]	+85°C [%]	+125°C [%]			+20°C [μA]	+85°C [μA]		
Rated voltage (+85°C) 40 V - Category voltage (+125°C) 25 V											
12	A	CT79	CT79 SMD	−24	+8	+10	6	234	1	2	450
56	B	CT79	CT79 SMD	−28	+13	+15	14	78	1	9	1100
100	C	CT79	CT79 SMD	−40	+13	+15	18	48	2	17	1450
220	D	CT79	CT79 SMD	−55	+23	+23	22	27	3	22	1900
Rated voltage (+85°C) 50 V - Category voltage (+125°C) 30 V											
5	A	CT79	CT79 SMD	−16	+5	+6	3	400	1	2	580
10	A	CT79	CT79 SMD	−20	+8	+9	4	250	1	2	715
25	B	CT79	CT79 SMD	−20	+10,5	+12	8	95	1	5	1065
47	B	CT79	CT79 SMD	−24	+13	+15	11	70	1	9	1215
60	C	CT79	CT79 SMD	−16	+10,5	+12	12	45	2	12	1335
82	C	CT79	CT79 SMD	−32	+13	+15	15	45	2	10	1460
160	D	CT79	CT79 SMD	−50	+23	+23	17	27	3	22	2040
Rated voltage (+85°C) 60 V - 63 V - Category voltage (+125°C) 40 V											
4	A	CT79	CT79 SMD	−16	+5	+6	2,8	550	1	2	525
8,2	A	CT79	CT79 SMD	−20	+8	+9	4	275	1	2	625
20	B	CT79	CT79 SMD	−16	+10,5	+12	+7	105	1	5	1026
39	B	CT79	CT79 SMD	−24	+10	+12	10	90	1	9	1185
50	C	CT79	CT79 SMD	−16	+10,5	+12	10	50	2	12	1341
68	C	CT79	CT79 SMD	−30	+10,5	+12	13	50	2	10	1393
140	D	CT79	CT79 SMD	−40	+20	+20	16	28	3	22	1990
150	D	CT79	CT79 SMD	−40	+20	+20	17	27	3	22	1865
Rated voltage (+85°C) 75 V - 80 V - Category voltage (+125°C) 50 V											
3,5	A	CT79	CT79 SMD	−16	+5	+6	2,5	650	1	2	525
6,8	A	CT79	CT79 SMD	−20	+8	+9	3	300	1	2	610
15	B	CT79	CT79 SMD	−16	+8	+9	6	150	1	5	1000
33	B	CT79	CT79 SMD	−24	+10	+12	10	90	1	9	1079
40	C	CT79	CT79 SMD	−16	+10,5	+12	9	60	2	12	1293
56	C	CT79	CT79 SMD	−28	+10,5	+15	11	60	2	10	1396
68	C	CT79	CT79 SMD	−30	+14	+15	13	50	2	10	1522
100	D	CT79	CT79 SMD	−35	+20	+20	12	36	9	36	1500
110	D	CT79	CT79 SMD	−35	+20	+20	11	29	3	24	1990
120	D	CT79	CT79 SMD	−36	+20	+20	12	28	3	24	1914
150	D	CT79	CT79 SMD	−48	+21	+22	17	30	9	36	1914
Rated voltage (+85°C) 100 V - Category voltage (+125°C) 65 V											
2,5*	A	CT79	CT79 SMD	−16	+7	+8	2	950	1	2	505
4,7	A	CT79	CT79 SMD	−16	+7	+8	3	500	1	2	565
11*	B	CT79	CT79 SMD	−16	+8	+8	5	200	1	4	835
22	B	CT79	CT79 SMD	−16	+7	+8	7,5	100	1	9	1065
30	C	CT79	CT79 SMD	−16	+8	+8	7	80	2	12	1240
33	C	CT79	CT79 SMD	−16	+8	+8	7	93	2	10	1200
39	C	CT79	CT79 SMD	−16	+8	+8	8	90	2	10	1282
43	C	CT79	CT79 SMD	−20	+8	+8	8	70	2	10	1389
47	C	CT79	CT79 SMD	−20	+7	+8	8	70	2	10	1389
68	D	CT79	CT79 SMD	−24	+15	+15	8	42	3	26	1859
82	D	CT79	CT79 SMD	−24	+15	+15	10	39	3	24	1859
86	D	CT79	CT79 SMD	−24	+15	+15	10	30	3	24	1859
Rated voltage (+85°C) 125 V - Category voltage (+125°C) 85 V											
1,7*	A	CT79	CT79 SMD	−16	+7	+8	2	1250	1	2	415
2,2	A	CT79	CT79 SMD	−16	+7	+8	2	1250	1	2	452
2,7	A	CT79	CT79 SMD	−16	+7	+8	3	780	1	2	452
3,3	A	CT79	CT79 SMD	−16	+7	+8	3	600	1	2	495
3,6	A	CT79	CT79 SMD	−16	+7	+8	2,7	600	1	2	520
3,9	A	CT79	CT79 SMD	−16	+7	+8	3,5	557	1	2	495
9*	B	CT79	CT79 SMD	−16	+7	+8	5	240	1	5	755
14	B	CT79	CT79 SMD	−16	+7	+8	6	167	1	7	1050
15	B	CT79	CT79 SMD	−16	+7	+8	6	167	1	7	1050
18*	C	CT79	CT79 SMD	−16	+7	+8	5	129	2	9	1130
25	C	CT79	CT79 SMD	−16	+7	+8	6	93	2	10	1335
27	C	CT79	CT79 SMD	−16	+7	+8	6	106	2	13	1282
56	D	CT79	CT79 SMD	−25	+15	+15	6	32	3	28	1859

[Extended range]

CT 79E - CT 79E SMD

STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100 Hz +20°C (μF)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance +20°C (Ω)	Max. I leak		Irms Max. 40 kHz +85°C (mA)	
			−55°C (%)	+85°C (%)	+125°C (%)			+20°C (μA)	+85°C (μA)		
Rated voltage [+85°C] 6 V - 6,3 V - Category voltage [+125°C] 4 V											
120	A	CT79E	CT79E SMD	−41	+15	+16	21	81	1,5	3	820
150	A	CT79E	CT79E SMD	−42	+16	+16	34	80	2	9	820
160	A	CT79E	CT79E SMD	−42	+16	+16	41	80	2	9	820
220*	A	CT79E	CT79E SMD	−64	+13	+16	50	36	2	9	1000
470	B	CT79E	CT79E SMD	−60	+20	+20	90	46	2	10	1281
560	B	CT79E	CT79E SMD	−68	+20	+20	106	48	2	10	1255
820*	B	CT79E	CT79E SMD	−88	+16	+20	155	18	3	14	1500
1500	C	CT79E	CT79E SMD	−90	+20	+25	172	18	5	20	1900
2200	D	CT79E	CT79E SMD	−90	+25	+25	170	13	6	24	2300
Rated voltage [+85°C] 8 V - Category voltage [+125°C] 5 V											
120	A	CT79E	CT79E SMD	−44	+17,5	+20	32	80	2	6	820
180*	A	CT79E	CT79E SMD	−60	+13	+16	41	45	2	9	1000
430	B	CT79E	CT79E SMD	−64	+17,5	+20	64	54	2	10	1230
680*	B	CT79E	CT79E SMD	−83	+16	+20	130	22	3	14	1500
1500*	C	CT79E	CT79E SMD	−90	+20	+25	170	18	5	20	1900
1800*	D	CT79E	CT79E SMD	−90	+25	+30	138	14	7	25	2300
Rated voltage [+85°C] 10 V - Category voltage [+125°C] 6,3 V											
68	A	CT79E	CT79E SMD	−40	+15	+16	21	85	1,5	3	820
82	A	CT79E	CT79E SMD	−40	+16	+16	25	84	2	6	820
100	A	CT79E	CT79E SMD	−40	+16	+16	30	82	2	6	820
150*	A	CT79E	CT79E SMD	−55	+13	+13	34	54	2	9	900
300	B	CT79E	CT79E SMD	−54	+16	+18	60	52	2	10	1195
330	B	CT79E	CT79E SMD	−54	+17	+18	65	52	2	10	1195
350	B	CT79E	CT79E SMD	−60	+18	+18	68	52	2	10	1195
390	B	CT79E	CT79E SMD	−60	+19	+20	74	54	2	10	1195
470	C	CT79E	CT79E SMD	−65	+18	+20	44	25	2	15	1800
560*	B	CT79E	CT79E SMD	−77	+16	+20	106	27	3	16	1450
850	C	CT79E	CT79E SMD	−84	+25	+25	111	36	4	16	1720
1000	C	CT79E	CT79E SMD	−80	+25	+25	92	36	4	16	1720
1200	C	CT79E	CT79E SMD	−80	+20	+25	137	18	5	20	1850
1500	D	CT79E	CT79E SMD	−88	+25	+30	114	15	7	25	2360
1800	D	CT79E	CT79E SMD	−88	+30	+30	138	24	7	25	2360
2200*	D	CT79E	CT79E SMD	−88	+30	+30	170	22	8	26	2360
Rated voltage [+85°C] 15 V - 16 V - Category voltage [+125°C] 10 V											
47	A	CT79E	CT79E SMD	−28	+16	+16	20	100	1,5	3	760
56	A	CT79E	CT79E SMD	−28	+16	+16	22	100	1,5	3	760
82*	A	CT79E	CT79E SMD	−35	+12	+16	20	43	2	6	915
100*	A	CT79E	CT79E SMD	−44	+13	+16	30	72	2	9	900
220	B	CT79E	CT79E SMD	−35	+16	+16	42	62	2	10	1215
270	B	CT79E	CT79E SMD	−45	+18	+18	55	60	2	12	1215
290	B	CT79E	CT79E SMD	−54	+18	+18	60	65	2	12	1215
330	C	CT79E	CT79E SMD	−58	+18	+20	40	30	2	14	1760
390*	B	CT79E	CT79E SMD	−66	+16	+20	74	31	3	16	1450
680	C	CT79E	CT79E SMD	−80	+25	+25	80	42	5	20	1582
750	C	CT79E	CT79E SMD	−80	+25	+25	95	42	6	24	1582
820	C	CT79E	CT79E SMD	−77	+20	+25	95	22	6	24	1800
850	D	CT79E	CT79E SMD	−80	+25	+25	95	24	8	32	2300
1000	D	CT79E	CT79E SMD	−77	+25	+25	92	17	8	32	2300
1200	D	CT79E	CT79E SMD	−84	+25	+30	103	25	8	32	2300

* out of CECC range

CT 79E - CT 79E SMD

(Extended range)

STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100 Hz +20°C [μF]	Case [code]	Type	Capacitance maximum change			Max. DF +20°C [%]	Max. Impedance +20°C [Ω]	Max. I leak		Irms Max. 40 kHz +85°C [mA]	
			−55°C [%]	+85°C [%]	+125°C [%]			+20°C [μA]	+85°C [μA]		
Rated voltage (+85°C) 25 V - Category voltage (+125°C) 16 V											
27	A	CT79E	CT79E SMD	−20	+12	+12	11	140	1,5	3	715
33	A	CT79E	CT79E SMD	−24	+14	+14	13	130	1,5	3	715
39	A	CT79E	CT79E SMD	−28	+16	+16	16	120	2	9	715
43	A	CT79E	CT79E SMD	−28	+16	+16	18	120	2	9	715
68*	A	CT79E	CT79E SMD	−40	+12	+15	22	90	2	9	850
150	B	CT79E	CT79E SMD	−35	+15	+15	32	62	2	10	1130
160	B	CT79E	CT79E SMD	−35	+15	+15	34	60	2	10	1130
180	B	CT79E	CT79E SMD	−48	+14	+15	34	60	2	10	1130
220	C	CT79E	CT79E SMD	−52	+18	+20	33	33	2	13	1614
270*	B	CT79E	CT79E SMD	−62	+13	+16	55	33	2	16	1400
390	C	CT79E	CT79E SMD	−70	+25	+25	48	48	7	28	1396
470	C	CT79E	CT79E SMD	−76	+25	+25	48	48	7	28	1398
540*	C	CT79E	CT79E SMD	−80	+25	+25	60	48	7	28	1398
560	C	CT79E	CT79E SMD	−72	+20	+25	60	24	7	28	1750
680	D	CT79E	CT79E SMD	−72	+25	+25	60	19	8	32	2100
820	D	CT79E	CT79E SMD	−80	+25	+25	82	26	8	32	1862
850	D	CT79E	CT79E SMD	−80	+25	+25	95	26	8	32	1970
Rated voltage (+85°C) 30 V - Category voltage (+125°C) 20 V											
25	A	CT79E	CT79E SMD	−24	+12	+12	11	160	1,5	3	640
33	A	CT79E	CT79E SMD	−30	+12	+14	12	160	2	9	640
47*	A	CT79E	CT79E SMD	−23	+12	+15	20	57	2	6	830
56*	A	CT79E	CT79E SMD	−38	+12	+15	22	100	2	9	800
120	B	CT79E	CT79E SMD	−32	+15	+15	30	60	2	10	1185
150	B	CT79E	CT79E SMD	−35	+15	+15	32	60	2	10	1185
170	B	CT79E	CT79E SMD	−48	+15	+15	34	65	2	12	1185
220*	B	CT79E	CT79E SMD	−60	+13	+16	42	36	3	16	1200
300	C	CT79E	CT79E SMD	−60	+15	+15	43	44	6	24	1559
330	C	CT79E	CT79E SMD	−65	+25	+25	45	52	6	24	1373
350	C	CT79E	CT79E SMD	−70	+25	+25	48	52	8	32	1477
390	C	CT79E	CT79E SMD	−75	+25	+25	55	52	8	32	1477
430	C	CT79E	CT79E SMD	−80	+25	+25	60	54	8	32	1477
470*	C	CT79E	CT79E SMD	−65	+20	+25	64	25	8	32	1500
560	D	CT79E	CT79E SMD	−65	+25	+30	40	20	9	36	2000
Rated voltage (+85°C) 40 V - Category voltage (+125°C) 25 V											
15	A	CT79E	CT79E SMD	−20	+10	+12	7	140	1	2	660
18	A	CT79E	CT79E SMD	−20	+12	+12	10	200	1,5	4	580
22	A	CT79E	CT79E SMD	−24	+12	+12	11	190	1,5	4	580
33*	A	CT79E	CT79E SMD	−20	+10	+12	12	88	3	8	795
68	B	CT79E	CT79E SMD	−24	+13	+15	15	60	1	8	1285
100	B	CT79E	CT79E SMD	−40	+15	+15	25	60	2	10	1285
120	B	CT79E	CT79E SMD	−32	+15	+15	30	62	2	12	1241
150	C	CT79E	CT79E SMD	−48	+14	+15	23	35	2	12	1525
270	C	CT79E	CT79E SMD	−60	+25	+25	37	52	7	28	1373
330	C	CT79E	CT79E SMD	−65	+25	+25	43	52	8	32	1373
390	D	CT79E	CT79E SMD	−75	+25	+25	43	30	8	32	1900
470	D	CT79E	CT79E SMD	−80	+25	+25	45	30	9	36	1900
Rated voltage (+85°C) 50 V - Category voltage (+125°C) 30 V											
18	A	CT79E	CT79E SMD	−24	+12	+12	10	200	1,5	3	580
22	A	CT79E	CT79E SMD	−24	+12	+12	11	190	2	9	580
33*	A	CT79E	CT79E SMD	−29	+10	+12	12	135	2	9	700
100	B	CT79E	CT79E SMD	−40	+15	+15	25	67	3	15	1150
120*	B	CT79E	CT79E SMD	−42	+12	+15	22,5	49	4	24	1200
270	C	CT79E	CT79E SMD	−46	+20	+25	37	29	8	32	1450
330*	D	CT79E	CT79E SMD	−46	+25	+30	38	22	9	36	1900
350	D	CT79E	CT79E SMD	−70	+25	+25	40	30	9	36	1900
390	D	CT79E	CT79E SMD	−75	+25	+25	43	30	9	36	1900
430	D	CT79E	CT79E SMD	−80	+25	+25	45	31	10	40	1900

* out of CECC range

[Extended range]

CT 79E - CT 79E SMD

STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100 Hz +20°C (μF)	Case (code)	Type		Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance +20°C (Ω)	Max. I leak		Irms Max. 40 kHz +85°C (mA)
				-55°C (%)	+85°C (%)	+125°C (%)			+20°C (μA)	+85°C (μA)	
Rated voltage (+85°C) 60 V - 63 V - Category voltage (+125°C) 40 V											
10	A	CT79E	CT79E SMD	-20	+8	+9	4	250	1	2	572
12	A	CT79E	CT79E SMD	-20	+8	+9	7	233	2	4	572
15	A	CT79E	CT79E SMD	-22	+9	+9	8	220	2	9	562
27*	A	CT79E	CT79E SMD	-24	+10	+12	10	144	3	12	700
47	B	CT79E	CT79E SMD	-24	+13	+15	13	70	1	9	1150
56	B	CT79E	CT79E SMD	-26	+14	+15	18	72	2	12	1150
82	B	CT79E	CT79E SMD	-36	+15	+15	22	70	2	12	1150
100*	B	CT79E	CT79E SMD	-36	+12	+15	19	54	4	20	1100
100	C	CT79E	CT79E SMD	-37	+14	+15	18	42	2	11	1420
120	C	CT79E	CT79E SMD	-40	+18	+18	20	49	3	18	1420
220	C	CT79E	CT79E SMD	-40	+16	+20	30	29	8	32	1400
270	D	CT79E	CT79E SMD	-45	+20	+25	26	23	9	36	1850
330	D	CT79E	CT79E SMD	-72	+25	+25	32	31	10	40	1850
Rated voltage (+85°C) 75 V - 80 V - Category voltage (+125°C) 50 V											
8,2	A	CT79E	CT79E SMD	-22	+9	+9	6	280	1,5	3	610
9	A	CT79E	CT79E SMD	-22	+9	+9	6	280	2	4	572
22*	A	CT79E	CT79E SMD	-19	+10	+12	8,5	157	3	12	600
43	B	CT79E	CT79E SMD	-24	+10,5	+12	15	89	2	10	1051
47	B	CT79E	CT79E SMD	-30	+14	+14	15	87	2	10	1051
56	B	CT79E	CT79E SMD	-28	+10,5	+15	11	72	2	12	1051
68	B	CT79E	CT79E SMD	-36	+15	+15	21	86	2	12	1051
82*	B	CT79E	CT79E SMD	-30	+12	+15	15	63	4	24	1000
82	C	CT79E	CT79E SMD	-32	+14	+15	15	45	2	10	1335
100	C	CT79E	CT79E SMD	-36	+17	+18	19	60	8	32	1335
150	C	CT79E	CT79E SMD	-40	+20	+20	25	60	9	36	1335
180	C	CT79E	CT79E SMD	-35	+16	+20	28	30	9	36	1335
220	D	CT79E	CT79E SMD	-40	+20	+22	24,4	24	10	40	1850
250	D	CT79E	CT79E SMD	-68	+25	+25	40	33	10	40	1850
270*	D	CT79E	CT79E SMD	-68	+25	+25	42	35	11	44	1850
Rated voltage (+85°C) 100 V - Category voltage (+125°C) 65 V											
5,6	A	CT79E	CT79E SMD	-17	+8	+8	6	475	2	5	530
10*	A	CT79E	CT79E SMD	-17	+10	+12	4,5	200	3	12	800
30	B	CT79E	CT79E SMD	-16	+8	+8	10	99	3	15	1065
33	B	CT79E	CT79E SMD	-16	+8	+8	14	95	3	15	1065
39	B	CT79E	CT79E SMD	-20	+12	+12	10	80	2	12	1300
56	C	CT79E	CT79E SMD	-28	+14	+15	11	60	2	10	1335
68	C	CT79E	CT79E SMD	-30	+14	+15	11,3	40	10	40	1600
100	D	CT79E	CT79E SMD	-35	+20	+20	11	36	3	24	1859
120*	D	CT79E	CT79E SMD	-35	+15	+17	25	30	12	48	2000
Rated voltage (+85°C) 125 V - Category voltage (+125°C) 85 V											
6,8*	A	CT79E	CT79E SMD	-14	+10	+12	6	300	3	12	700
18	B	CT79E	CT79E SMD	-16	+8	+8	8	133	2	10	1065
27*	B	CT79E	CT79E SMD	-18	+12	+15	7,2	90	5	24	1200
39	C	CT79E	CT79E SMD	-16	+8	+8	8	90	2	10	1282
47	C	CT79E	CT79E SMD	-23	+10	+10	7,9	50	2	10	1500
68	D	CT79E	CT79E SMD	-24	+15	+15	8	42	3	26	1859
82	D	CT79E	CT79E SMD	-24	+15	+17	10	32	3	24	1900
Rated voltage (+85°C) 150 V - Category voltage (+125°C) 100 V											
2,5*	A	CT79E	CT79E SMD	-16	+8	+8	3	780	1	3	495
3,3*	A	CT79E	CT79E SMD	-16	+8	+8	3	600	1	3	495
14*	B	CT79E	CT79E SMD	-16	+8	+8	10	167	2	10	1065
18*	B	CT79E	CT79E SMD	-16	+8	+8	10	133	2	10	1065
25*	C	CT79E	CT79E SMD	-16	+8	+8	20	93	2	20	1335
47*	C	CT79E	CT79E SMD	-24	+10	+10	20	70	2	20	1335
56*	D	CT79E	CT79E SMD	-24	+15	+15	30	47	3	30	1860
82*	D	CT79E	CT79E SMD	-24	+18	+18	30	39	3	30	1860

* out of CECC range

NOTE

Voltage 6V, 8V, 15V, 30V, 50V, 60V and 75V concern the MIL standard range.

Electrical characteristics

CAPACITANCE


The capacitance is defined by a rated value (C_R , indicated on the capacitor) and a tolerance (generally $\pm 20\%$).

The capacitance is measured at a 100 Hz frequency under a 0,1 to 1 V_{AC} voltage and a 2,1 to 2,5 V bias (or 9 to 10V for $U_R \geq 100$ V).

At room temperature, it must be in the range defined by the rated value and the tolerance.

Capacitance change vs temperature: see typical curves below. Maximum changes are given, for each type, on the data sheets.

CAPACITANCE CHANGE VS TEMPERATURE

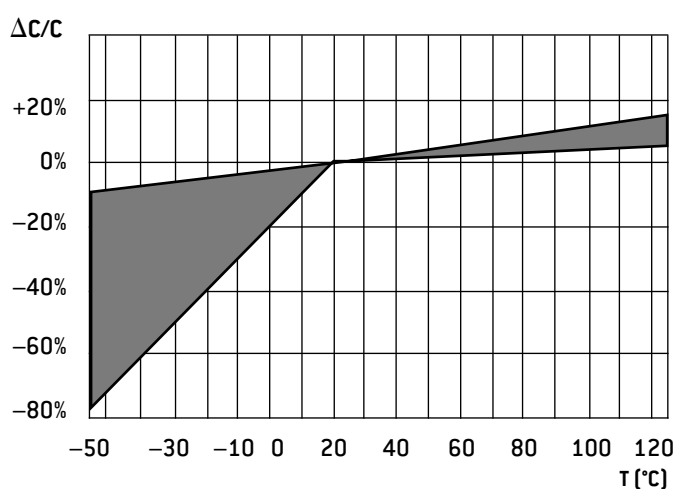


TOLERANCE (ON RATED CAPACITANCE)

It defines, with the rated capacitance, the range in which the capacitance value must be at room temperature.

e.g.: Rated capacitance: 100 μ F
Tolerance: 20%
The measured capacitance must be between:
 $100 - (20\% \text{ of } 100) = 80$ and $100 + (20\% \text{ of } 100) = 120$

The standard tolerance for tantalum capacitors is 20%.




The values (and multiples) that are indicated in bold characters (E6 serie) can be supplied with standard tolerances $\pm 20\%$ and $\pm 10\%$ ($\pm 5\%$ on request).

The values (and multiples) that are indicated in italics (E12 serie) can be only supplied with tolerance $\pm 10\%$ ($\pm 5\%$ on request)

DIRECT DC VOLTAGE

The rated voltage (U_R), indicated on the capacitor, is the maximum DC voltage which can be applied continuously between -55°C and $+85^\circ\text{C}$.

For the types which can be used up to 125°C , the voltage must be derated between $+85^\circ\text{C}$ and $+125^\circ\text{C}$ according to the following curve.

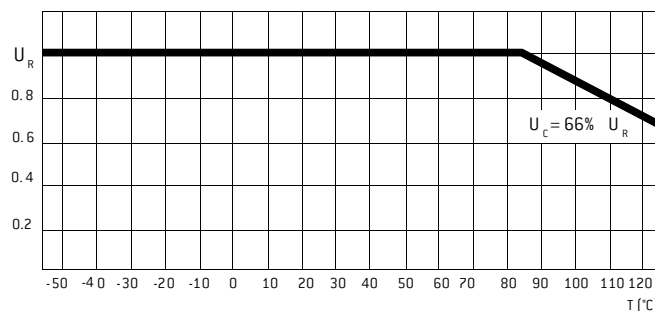

The category voltage (U_C) is consequently the maximum DC voltage which can be applied continuously at $+125^\circ\text{C}$.

The surge voltage is the maximum voltage which can be applied for short periods.

It is given for each type in the data sheet and is generally equal to 1,15 times U_R between -55°C and $+85^\circ\text{C}$ and 1,15 times U_C at $+125^\circ\text{C}$.

Tests are performed with charging periods of 30 seconds, through a 1000 Ω resistor, and discharging periods of 5min30s. 1000 cycles are done.

REVERSE VOLTAGE

Capacitors in silver cases (CT 4 and CT 9 types) cannot withstand any reverse voltage : it will cause damage, more or less rapidly depending upon the voltage value.

It is therefore necessary to be sure that the bias voltage is high enough to avoid that the AC voltage creates a reverse voltage (negative peak).

Capacitors in tantalum cases (CT 79 type) can withstand 3 volts DC reverse voltage, at all the temperatures (-55°C to 125°C).

Electrical characteristics


LEAKAGE CURRENT

Leakage current is the residual current which flows through the capacitor after the charging time, under rated voltage. It is measured after a time not exceeding 5 minutes and is given in μA .

It is equivalent to the insulation resistance of the capacitor and it must be as low as possible.

Maximum leakage current is a function of capacitance and rated voltage values and is given, for each type, in the data sheets.

LEAKAGE CURRENT CHANGE VS APPLIED VOLTAGE

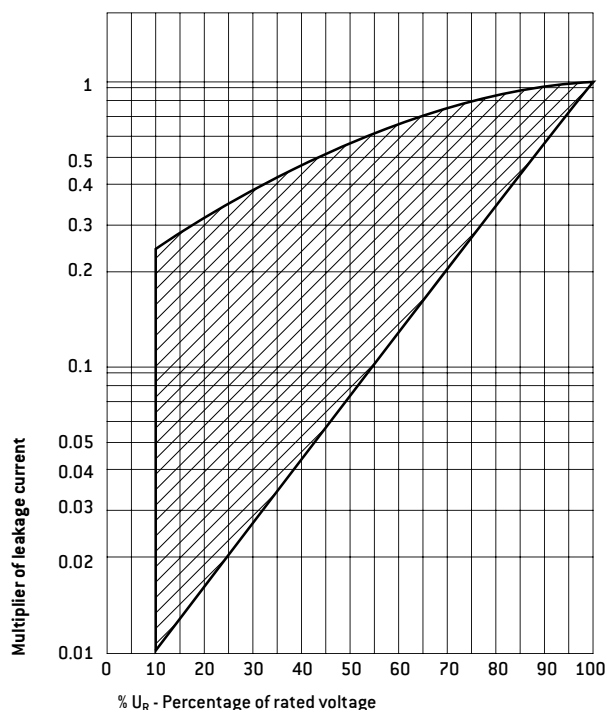

DISSIPATION FACTOR

Dissipation factor is generally measured at the same time as the capacitance, with the same conditions. It is a function of the series resistance of the capacitor and the capacitance at low frequency.


$$DF = ESR \times C \times 2\pi f$$

At low frequency, the series resistance is the sum of an ohmic part (leads, contacts, MnO_2 ,...) and the dielectric losses.

Dissipation factor is given in % and maximum limits are given for each type in the data sheets.

EQUIVALENT SERIES RESISTANCE OR IMPEDANCE

Equivalent circuit of a capacitor

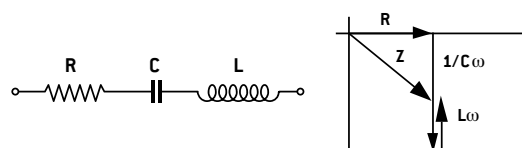

R: equivalent series resistance of the capacitor (leads, contacts, MnO_2 , dielectric losses)

L: inductance mainly due to the leads

C: capacitance

Impedance

It is specified at 100 Hz and $-55^\circ C$ and the formula for impedance is:


$$Z = \sqrt{R^2 + [L\omega - 1/C\omega]^2}$$

It can be seen that:


- at low frequencies, impedance is a function of capacitance
- at high frequencies, impedance is a function of inductance
- at medium frequencies, it is a function of the ESR

Maximum impedance: see data sheets.

ESR CHANGE VS TEMPERATURE

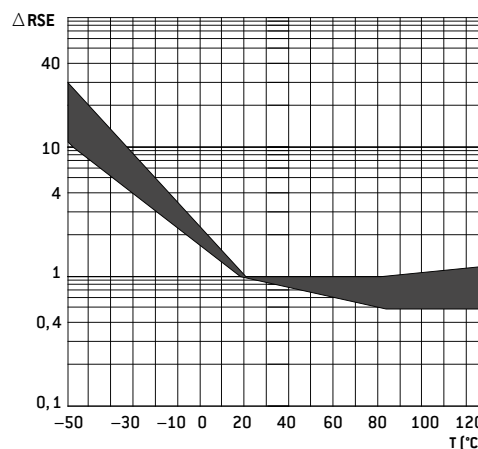

ESR CHANGE VS FREQUENCY

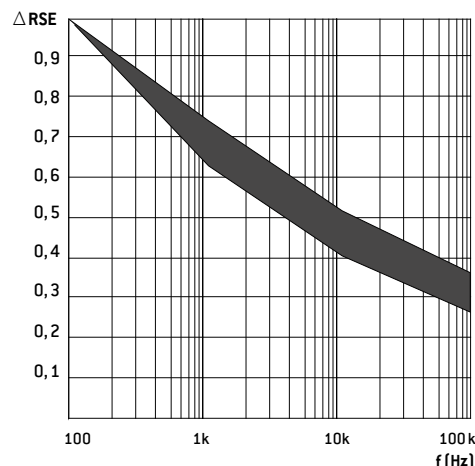

Electrical characteristics

MAXIMUM RIPPLE CURRENT

TYPES CT 79 - CT 79E - CT 79 HT200 - ST79 - ST 79 HT200

Maximum ripple currents which are indicated in the data sheets are given for the following conditions:

Temperature: +85°C (up to +200°C for CT 79 HT200 and ST 79 HT200)

Frequency: 40 kHz

Applied voltage: 0,66 U_R

If conditions are different, use the multipliers given in the table below to calculate the new maximum current.

Frequency		100 Hz				1 kHz				10 kHz				40 kHz				100 kHz			
Temperature		+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C
Peak voltage in % of U_R	66%	0,6	0,6	0,46	0,27	0,72	0,72	0,55	0,32	0,88	0,88	0,68	0,4	1	1	0,77	0,45	1,1	1,1	0,85	0,5
	70%	0,6	0,58	0,44	–	0,72	0,7	0,52	–	0,88	0,85	0,64	–	1	0,97	0,73	–	1,1	1,07	0,8	–
	80%	0,6	0,52	0,35	–	0,72	0,62	0,42	–	0,88	0,76	0,52	–	1	0,87	0,59	–	1,1	0,96	0,65	–
	90%	0,6	0,46	–	–	0,72	0,55	–	–	0,88	0,67	–	–	1	0,77	–	–	1,1	0,85	–	–
	100%	0,6	0,39	–	–	0,72	0,45	–	–	0,88	0,55	–	–	1	0,63	–	–	1,1	0,69	–	–

TYPES CT 4 - CT 4E - CT 9 - CT 9E

Maximum ripple currents which are indicated in the data sheets are given for the following conditions:

- frequency from 100 Hz to 100 kHz and more
- temperature from –55°C to +85°C

Correction vs temperature

If the temperature is higher than 85°C, decrease linearly the maximum value from 100% at +85°C to 80% at +125°C.

Correction vs frequency

If frequency is lower than 100 Hz, apply the following multipliers to the maximum ripple currents:

75 Hz: 0,79 **60 Hz:** 0,65 **50 Hz:** 0,55 **25 Hz:** 0,55

OTHERS RULES (FOR ALL TYPES)

- the sum of the positive peak AC voltage and the DC bias voltage must be lower than the rated voltage.
- the negative peak must not create any reverse voltage (or maximum 3 volts for CT 79 and CT 79E types).
- because of the increase of the series resistance at low temperature, it is better to not apply directly the maximum ripple current but to increase this one gradually to raise the capacitor temperature.

CLIMATIC CHARACTERISTICS

1- CLIMATIC CATEGORY

Climatic category defines the temperature range over which the capacitor can be used continuously, and also the number of days for the damp heat test (this test is performed periodically at 40°C with a 93% moisture rate).

Note: it is necessary to derate the voltage for temperatures higher than 85°C (see page 14).

2- THERMAL SHOCKS - RAPID CHANGES OF TEMPERATURE

This test is performed to check that the capacitors can withstand sudden temperature changes. The method which is used is the one with two chambers, one at –55°C, the other one at +125°C. Five cycles are performed, with 30min at low temperature and 30min at high temperature, during the periodical tests (30 cycles for CT 79 type). Electrical characteristics are measured after this test.

3 - DAMP HEAT TEST

This test is performed during the periodical test, with the following conditions:

Temperature: 40°C

Humidity: 90 to 95%

DC voltage: without

Time: 21 or 56 days

Electrical characteristics are measured after this test.

MECHANICAL CHARACTERISTICS

1 - VIBRATIONS

This test is performed during the periodical test, with the following conditions:

CT 9 - CT9 E types

- Method B4
- Frequency: 10 to 2000 Hz
- Amplitude: 1,5mm or 196m/s²
- Time: 6 hours

CT 79 - CT 79E - CT 79 HT200 - ST 79 - ST79 HT200 types

- Method B4
- Frequency: 10 to 2000 Hz
- Amplitude: 3,5mm or 490m/s²
- Time: 6 hours

2 - SHOCKS

This test is performed just after the vibrations test, with the following conditions for all types:

- Acceleration: 981 m/s²
- Pulse width: 6 ms
- Shape: 1/2 sinewave
- Number of shocks: 3 for each of the 3 directions

Electrical characteristics

RELIABILITY

Reliability of a component can be defined as its probability to work without any failure, in defined conditions and during a fixed time.

Reliability is not therefore only a function of the component quality, but also of the application and environmental conditions.

The parameter which is the most commonly used for the reliability is the failure rate in time, generally expressed in % per 1000 hours.

CALCULATION OF A COMPONENT FAILURE RATE USED IN AN EQUIPMENT

The calculation method on the next page uses parameters which are given by the CNET (Centre National d'Etude des Télécommunications) in its Reliability Data Book (RDF 1993).

The failure rate is calculated with parameters which are function of the capacitor (capacitance, case type, approvals, high surge current test) and others ones which are representative of application conditions (voltage, temperature, resistance in serie, environmental conditions).

Example:


CT 79E 2200 μ F - 6,3 V used under 3 volts, at 40°C, in a satellite in orbit:

$$\pi_t = 1,2 \quad \pi_v = 1,38$$


$$\pi_c = 1,4 \quad \pi_E = 0,5 \quad \pi_q = 1$$

$$\lambda = 3 \times 1,2 \times 1,38 \times 1,4 \times 0,5 \times 1.10^{-9}/h = 3,5.10^{-9}/h = 0,00035 \% \text{ defects}/1000 \text{ hours}$$

π_t = TEMPERATURE INFLUENCE

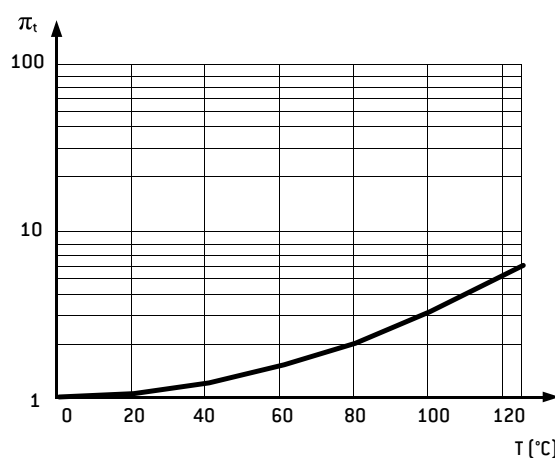

π_v = INFLUENCE OF APPLIED VOLTAGE VS RATED VOLTAGE

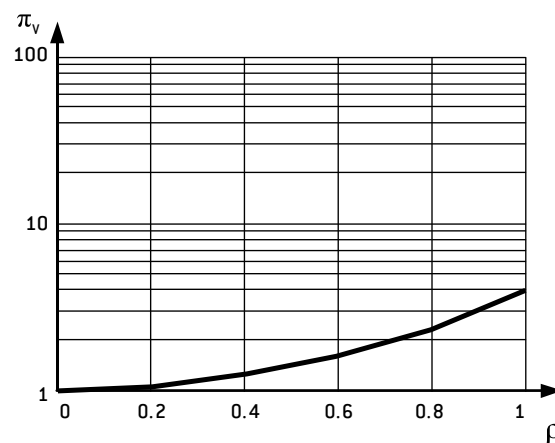

Formula:

with:

$$\pi_t = \exp [1,8. (t / t_m)^2]$$

t = using temperature
t_m = maximum temperature
Curve for t_m = 125°C

π_c = INFLUENCE OF CAPACITANCE

3,3 μ F	$\pi_c = 0,9$
20 μ F	$\pi_c = 1,0$
1000 μ F	$\pi_c = 1,3$
2200 μ F	$\pi_c = 1,4$

π_E = INFLUENCE OF CIRCUIT RESISTOR IN SERIE

Satellite in orbit	$\pi_E = 0,5$
Ground; stationary; protected	$\pi_E = 1$
Ground; stationary; non protected	$\pi_E = 2,5$
Ground; mobile; soft conditions	$\pi_E = 6$
Aircraft; soft conditions	$\pi_E = 6$
Ship; soft conditions	$\pi_E = 6$
Ground; mobile; hard conditions	$\pi_E = 8$
Ship; hard conditions	$\pi_E = 10$
Aircraft; hard conditions	$\pi_E = 15$
Satellite; launching	$\pi_E = 20$

π_q = INFLUENCE OF QUALIFICATION

Products approved to CECC	$\pi_q = 1,0$
Others products	$\pi_q = 2,0$

Electrical characteristics

PRODUCT SAFETY INFORMATION SHEET

This should read in conjunction with the Product Data Sheet/Specification.

Failure to observe the ratings, and the information on this sheet may result in a safety hazard.

1. MATERIAL CONTENT

Wet Tantalum Capacitors contain hazardous materials. The operating section contains:

Liquid Electrolyte - Gelled Dilute Sulphuric Acid.

Solid Tantalum Anode

The device consists of solder coated terminal wires and the materials listed below:

Silver Case or Tantalum Case

Silicon Rubber "O" Rings

P.T.F.E. Spacers

Filled epoxy resin end cap on Silver Case Product.

2. PHYSICAL FORM

These Capacitors are physically small and are cylindrical with axial leads.

3. INTRINSIC PROPERTIES

3.1 Operating Silver Cased Product

These capacitors will operate satisfactorily providing the sum of the applied d.c. and the peak a.c. ripple voltage does not exceed the rated d.c. voltage.

There must be no reversal of polarity.

The maximum ripple currents and voltages and d.c. polarising voltages are specified in the data sheets.

Tantalum Cased devices will stand up to $3 V_{DC}$ reverse for short periods of time.

A reverse application of the rated voltage will result in loss of capacitance, early short circuit failure and may result in fire or explosion.

It may also cause consequential failure of other associated components in circuit, e.g. diodes, transformers, etc.

3.2 Non-Operating

Wet Tantalum capacitors contain electrolyte which is a conducting material.

If electrolyte leaks onto a printed circuit board or similar insulated support, short circuits can be caused.

All electrolytes are corrosive to some extent.


No electrolyte should be allowed to come in contact with the skin, eyes, etc., and if they do appropriate medical treatment should be applied.

Applicable for types see below:

General purpose: CT 79 - CT 79 HT200 - ST 79 - ST 79 HT200

Extended ranges: CT 79E

CONSTRUCTION

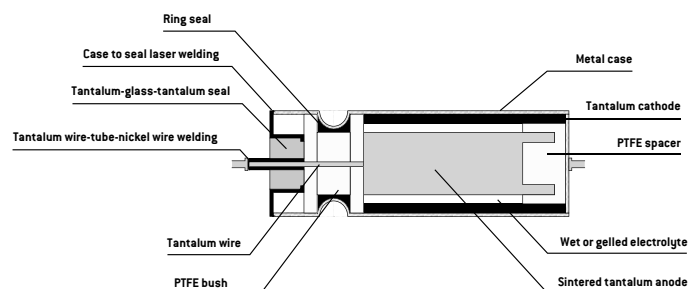

Applicable for types see below:



Glass metal seal - standard range: CT 9

Glass metal seal - extended range: CT 9E:


Epoxy end seal - standard range: CT 4

Epoxy end seal - extended range: CT 4E

CONSTRUCTION

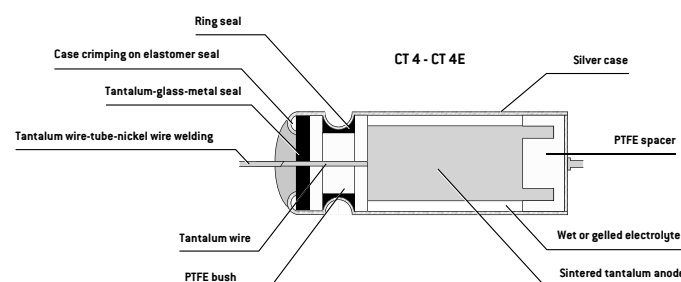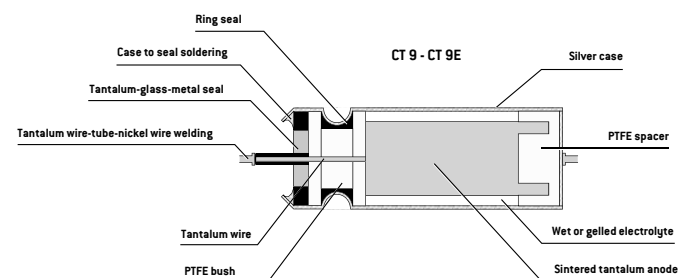

MARKING

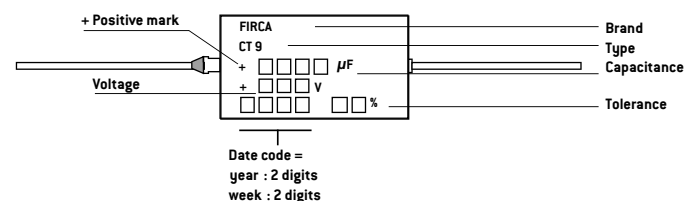

PACKAGING

In cardboard boxes

General information

Tantalum capacitors are, with ceramic, aluminium and film capacitors, one of the most used family.

The manufacturing technology and the constant improvements in tantalum powders allow it to be the capacitor with the highest CV (product capacitance x voltage) per volume, very long life and high reliability.

It has also the following advantages:

- wide range of capacitance (less than 1 μ F to more than 1000 μ F)
- wide operating temperature range (-55°C to $+200^{\circ}\text{C}$)
- Electrical characteristics stable with temperature
- Low leakage current
- Very low ESR for some types
- Stability after long periods of storage, without reforming

All these characteristics allow the tantalum capacitors to be more commonly used either in large volume markets like mobile phones or computers, or in specific markets like space, aerospace, military or railways.

Its main uses are found in the following applications:

- Filtering
- RC time constant
- By pass
- Energy storage
- Coupling

Tantalum capacitors can be divided into two big families and several sub-families:

Solid tantalum capacitors:

- Metal cases
- Moulded cases
- SMD (CHIPS) types

Wet tantalum capacitors:

- Silver cases
- Tantalum cases

HOW TO USE THE SELECTION GUIDE

- 1 - The technical selection guide can be used to select a type according to the technical requirements.
- 2 - The classification on CECC specification numbers indicates the corresponding type (or equivalent).
- 3 - The selection guide by family has the same classification as in the catalogue. You will find for each type the main features, the approvals and the page of the technical data sheet.

MANUFACTURING

ANODE AND INSULATOR

Tantalum capacitors are the capacitors which have the highest ratio capacitance per volume. This is mainly due to the high dielectric coefficient of its insulator and to its large cross-section.

The basic raw material is a high purity (greater than 99,99%) tantalum powder with a very fine granulation, compressed to form a cylinder or a parallelepiped constituting the anode of the capacitor (positive plate).

The pellet is then sintered at high temperature (1200°C to 2200°C), under hard vacuum (10^{-6} torr), firstly to purify the powder and secondly to obtain a strong mechanical structure by welding of the particles.

The insulating part is obtained by anodization to a depth of the tantalum surface which forms a tantalum pentoxide film (Ta_2O_5) with a thickness of about 16 angstroms per anodization volt. The dielectric coefficient is between 21 and 27 depending upon the anodization conditions.

WET ELECTROLYTE: CATHODE AND ENCAPSULATION

In this case, the cathode is formed by a sulphuric acid solution. The anodized tantalum pellet is impregnated with this solution and then placed in a silver or tantalum case, into which some equivalent gelled solution have been previously deposited.

The case is then crimped on the internal PTFE gasket to make the sealing. The final steps are either the soldering of a glass metal seal, or the crimping of an elastomer seal on the top of the case.

SOLID ELECTROLYTE: CATHODE AND ENCAPSULATION

In this case, the cathode is formed by manganous dioxide which is a grey semi conductor. It is obtained by dipping the pellets into a manganous nitrate water solution which impregnates the internal structure; this solution is then decomposed in a high temperature oven to obtain manganous dioxide. This operation is repeated several times. The nature and quality of this semi conductor have a big influence on some of the electrical parameters (especially the series resistance).

To finish the negative plate, a graphite coating and then a silver coating are deposited on the outside surface of the manganous dioxide.

The positive nickel lead is welded on the tantalum wire and the negative lead is either soldered for all the types with wire leads, or pasted with a silver epoxy for the surface mount models.

BURN-IN - SORTING - INSPECTION

All the products are then submitted to a final burn-in, with differing severities depending upon the characteristics of each type (temperature, voltage, time,...).

Then follows the sorting, marking and inspection operations. It can be noted that the procedures for these operations are the same for approved and non approved parts (except the periodical tests).

General information

TYPE IDENTIFICATION - ORDERING INFORMATION

THE COMPLETE IDENTIFICATION OF A PRODUCT IS MADE UP OF

- the type (or model)
- the tolerance
- the case size
- the rated voltage
- the rated capacitance
- if possible the CECC specification number

THE TYPE

It can be expressed as the standardized reference [CTS XX], the EXXELIA TANTALUM reference (indicated in brackets) or the CECC specification number.

Example: CTS1 = SI125 = CECC 30201-002

THE CASE SIZE

It is indicated on the technical data sheets in front of each capacitance-voltage value and is generally identified by a letter code. It is important to give this information because there can be, for the same type, a standard range and an extended range in which the same value will be available in two different sizes.

THE RATED CAPACITANCE

It can be expressed:

- directly in μF (eg: 47 μF)
- coded according to UTE C 90-510 specification, with:
 - a number of 3 digits maximum for the value
 - a multiplying factor to obtain the capacitance in pF
 - [K = 10^3 , M = 10^6 , G = 10^9]

Eg: 560M = $560 \cdot 10^6 \text{ pF} = 560 \mu\text{F}$
 4K7 = $4,7 \cdot 10^3 \text{ pF} = 0,0047 \mu\text{F}$

- coded according to MIL specification, with:
 - 2 digits number for the value
 - a multiplying factor to obtain the capacitance in pF (power of 10)

Eg: 567 = $56 \cdot 10^7 \text{ pF} = 560 \mu\text{F}$
 472 = $47 \cdot 10^2 \text{ pF} = 0,0047 \mu\text{F}$

THE TOLERANCE

It can be expressed directly in % or identified by a code letter:

M = $\pm 20\%$
 K = $\pm 10\%$
 J = $\pm 5\%$

N.B.: the standard tolerance for tantalum capacitors is 20%; if no tolerance is specified, it would be considered as 20%.

A 20% tolerance means in fact -20% to +20%.

THE RATED VOLTAGE

It is expressed directly in volts (V)

N.B.: 6.3V rated voltage can be coded as 6V.

ORDERING INFORMATION EXAMPLES

In clear:	CTC 3	D	10 μF	10%	25 V
	CTC 3D		10 μF	10%	25V
Coded:	CTC3D	10M	K	25V	
	CTC3D	106	K	025	

The products which are described in this catalogue are generally made to a CECC specification; these documents give in detail the following information for each type:

- The climatic, electrical and mechanical characteristics
- The test and inspection procedures
- The sampling methods and levels
- The tests periods

The reference specifications concerning the tantalum capacitors are the following:

CECC 30 000 (NFC 83-100)

Generic specification: fixed capacitors

- Terminology
- Quality Assessment Procedures
- Test and inspection methods

CECC 30 200 (NFC 83-112)

Sectional specification: tantalum capacitors

- Preferred characteristics
- Quality Assessment Procedures
- Test and inspection methods

CECC 30 201 XXX

Detail specifications solid tantalum capacitors

- Detailed characteristics for each Type

CECC 30 202 XXX

Detail specifications wet tantalum capacitors

- Detailed characteristics for each Type

CECC 30 800 (NFC 83-113)

Sectional specification: tantalum chip capacitors

- Preferred characteristics
- Quality Assessment Procedures
- Test and inspection methods

CECC 30 801 XXX

Detail specifications tantalum chip capacitors

- Detailed characteristics for each type
- The list of all the detail specifications is given in the selection guide, with the corresponding type.

NB: Some of the products refer to specifications which are no longer published.

In the catalogue, the types for which the CECC symbol is indicated are the ones which are approved (see CECC 00-200). The others types are however submitted to the same process and inspection procedures.

SPECIFICATIONS

In addition to CECC approvals, some of the products can be entered in Preferred Parts Lists; the principal ones are the following:

- GAM T1:** preferred parts list for the French military industry
- GAM T5:** qualified parts list for the French military industry
- MUAHAG:** preferred parts list for the European military industry
- LNZ 44-04:** preferred parts list for the French telecommunication industry
- ESCC EPPL I or II:** preferred parts list for the European Space Agency

The position of each type in the above lists is indicated in the selection guide at the beginning of this catalogue.