



### ERZ-HPA-1500-2700-29-E

The ERZ-HPA-1500-2700-29-E is a K Band Amplifier providing an output power of 30 dBm and a gain of 33 dB. The compact size and modularity makes it ideal for a wide range of applications.

## High Power Amplifier

ERZ-HPA-1500-2700-29-E

#### Main Features:

- Frequency Range: 15 to 27 GHz.
- Typical values: P1dB 30 dBm, Gain 33 dB
- RF connectors (I/O): 2.92 mm Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold platted compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

## Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

Parameter	Value			Units
	Min	Тур	Max	
Frequency	15	-	27	GHz
Output Power (P1dB)	27	30	31	dBm
Gain	30	33	35	dB
Noise Figure	-	-	-	dB
VSWR input	1.1:1	1.5:1	1.8:1	-
VSWR output	1.2:1	1.3:1	1.5:1	-
DC Voltage	8	12	16	V
Power Consumption	-	12	-	W
Connectors	2.92 mm Female IN/OUT			-

Performance

Specifications at a case temperature of 25°C



ERZ-HPA-1500-2700-29-E

## Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).


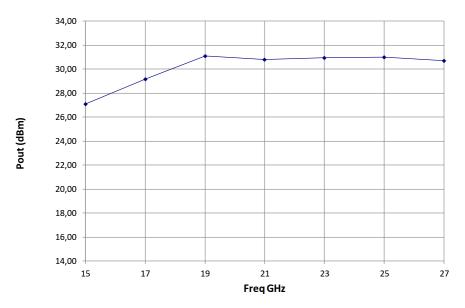


Figure 1: ERZ-HPA-1500-2700-29-E P1dB

## Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature ( $25^{\circ}$ C).

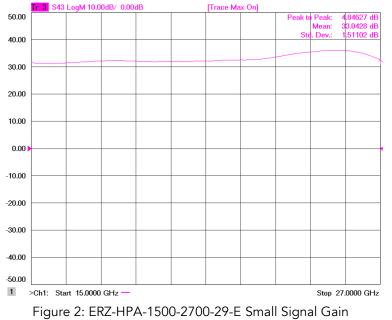

Tel: +34942291342





ERZ-HPA-1500-2700-29-E

## Input and Output Matching

Figure 3 and Figure 4 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).


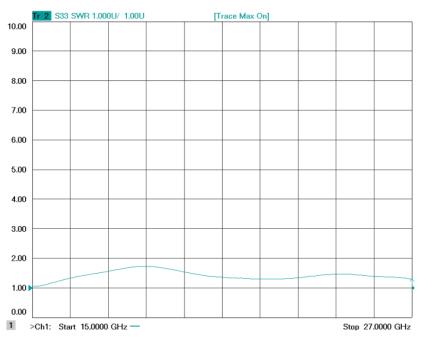


Figure 3: ERZ-HPA-1500-2700-29-E Input Matching



Tel: +34942291342

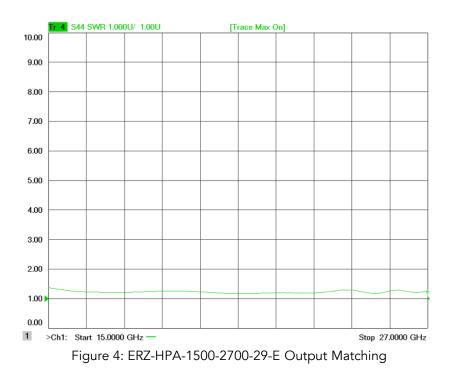

ERZ-HPA-1500-2700-29-E

## **Measurements Conditions**

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature	$25^{\circ}C \pm 2^{\circ}C$
Humidity	50% ± 10%
DUT Warm up time	30 min
Test equipment warm up time	60 min

### Absolute Maximum Ratings

Condition	Value
DC Voltage	+16 VDC
Maximum Input Power (CW)	2 dBm
Operation temperatura (at case)	-40 to 85°C
Storage temperature	-55 to 125°C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.


## **Environmental Specifications (By Design)**

Operating Temperature:	-45 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g,11ms,saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)



ERZ-HPA-1500-2700-29-E

## Mechanics and Housing

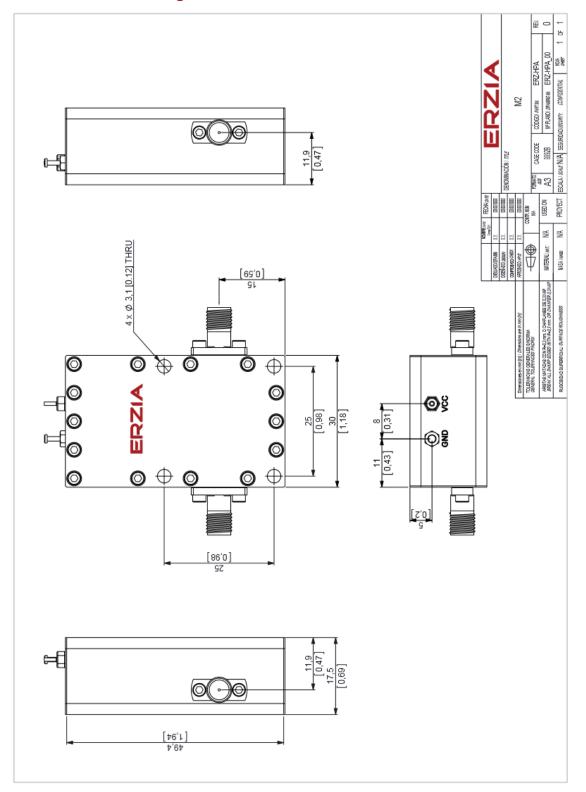

Tel: +34 942 29 13 42



ERZ-HPA-1500-2700-29-E

#### **Documentation and Test Reports**

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

## **Option (HS): Heat Sink**

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.


## Space / Military Usage

Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

### **Customization and Extended Performances**

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

## Model Number Codification

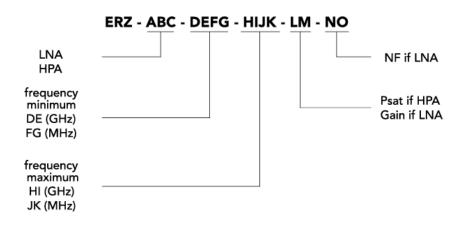

#### MODEL NUMBER

Tel: +34942291342

sales.rf@erzia.com

www.erzia.com

# ERZIA

20161205\_rev1.0

Copyright © 2016 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel:+34942291342

