# MIL-PRF-38534 AND 38535 CERTIFIED FACILITY



# M.S.KENNEDY CORP


# **HIGH TEMPERATURE** LOW DROPOUT REGULATOR



#### FEATURES:


- Operational from -55°C to +200°C
- Input Voltage range from +5V to +10V
- Available in 1.8V output voltage
- Alternate output voltages available
- Ultra low dropout for reduced power consumption
- Output Current up to 100mA @ 200°C
- **Over Current Limiting**
- Standby Quiescent Current is typically 1µA
- External Enable (Active Low) ٠
- Available in four lead options: Straight, Up, Down, and Gull Wing
- Contact MSK for Qualification Status

### **DESCRIPTION:**



The MSK5501 is an ultra low dropout, high temperature linear voltage regulator capable of delivering 100mA of output current at 200°C. Typical dropout voltage is 71mV with a 100mA load. This is a voltage controlled device and drive current does not increase with output current. The devise's supply current is typically constant from no load to maximum load. This device also has internal current limit protection. When the current limiting engages, the output voltage will decrease linearly until the over current condition ends. The MSK5501 is specifically designed for automotive, aeronautics and aerospace, and down-hole applications. The device is packaged in a hermetically sealed 5 pin SIP that is electrically isolated from internal circuitry for direct heat sinking.

#### EQUIVALENT SCHEMATIC

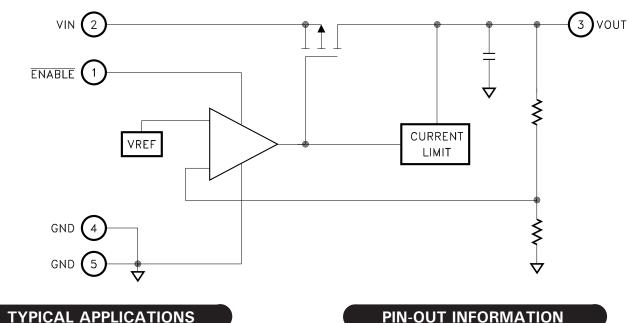

- **Reliable-Critical**
- Automotive
- Aeronautics & Aerospace
- Down-Hole
- Precision Regulators / References
- A/D and D/A Converters
- Current Sources.

#### **PIN-OUT INFORMATION**

- 1 ENABLE
- 2 VIN
- 3 VOUT
- 4 GND
- 5 GND

## **ABSOLUTE MAXIMUM RATINGS**

| VIN    | Respect to GND                    | 0.3V to 13.5V    |
|--------|-----------------------------------|------------------|
| ENABLE | Respect to GND.                   | 0.3 to VIN +0.3V |
| Tst    | Storage Temperature Range         | 65°C to +200°C   |
| Tc     | Case Operating Temperature Range. | 55°C to +200°C   |

8

# **ELECTRICAL SPECIFICATIONS**

| Parameter                      | Test Conditions                      | Group A  | MSK5501H SERIES |      |      | MSK5501 SERIES |      |      | Units |
|--------------------------------|--------------------------------------|----------|-----------------|------|------|----------------|------|------|-------|
| Farameter                      |                                      | Subgroup | Min.            | Typ. | Max. | Min.           | Typ. | Max. | Units |
| OUTPUT CHARACTERISTICS         |                                      |          |                 |      |      |                |      |      |       |
| Dropout Voltage                | IOUT = 100 mA                        | 1,2,3    | -               | 71   | TBD  | -              | 71   | TBD  | mV    |
| Output Voltage Tolerance       | VIN = +5V, IOUT = 10mA               | 1        | -0.2            | TBD  | +0.2 | -0.2           | TBD  | +0.2 | %     |
| Output voltage Tolerance       |                                      | 2,3      | TBD             | TBD  | TBD  | -              | -    | -    | %     |
|                                | 5V < VIN < 10V, IOUT = 0mA           | 1        | TBD             | 0.4  | TBD  | TBD            | 0.4  | TBD  | %     |
| Line Regulation                |                                      | 2        | TBD             | 0.9  | TBD  | -              | -    | -    | %     |
|                                |                                      | 3        | TBD             | 0.4  | TBD  | -              | -    | -    | %     |
|                                | VIN = + 5V,0mA < I0UT < 100mA        | 1        | -5              | TBD  | + 3  | -5             | TBD  | + 3  | %     |
| Output Voltage Load Regulation |                                      | 2        | TBD             | TBD  | TBD  | -              | -    | -    | %     |
|                                |                                      | 3        | -5              | TBD  | +3   | -              | -    | -    | %     |
| SUPPLY CURRENT                 |                                      |          |                 |      |      |                |      |      |       |
|                                | VIN = +5V, IOUT = 0mA                | 1        | -               | 1    | 2    | -              | 1    | 2    | mA    |
|                                |                                      | 2        | -               | 1.2  | 2    | -              | -    | -    | mA    |
| Supply Current                 |                                      | 3        | -               | 1    | 2    | -              | -    | -    | mA    |
| Supply Current                 | VIN = + 10V, IouT = 0mA              | 1        | -               | 1    | 2    | -              | 1    | -    | mA    |
|                                |                                      | 2        | -               | 1.2  | 2    | -              | -    | -    | mA    |
|                                |                                      | 3        | -               | 1    | 2    | -              | -    | -    | mA    |
| Standby Current                | $VIN = +5V, \overline{ENABLE} = 5V$  | 1,2,3    | -               | 17   | 25   | -              | 17   | 25   | uΑ    |
| Standby Current                | $VIN = +10V, \overline{ENABLE} = 5V$ | 1,2,3    | -               | 17   | 25   | -              | 17   | 25   | uΑ    |
| ENABLE                         |                                      |          |                 |      |      |                |      |      |       |
| ENABLE Input Current           | V ENABLE = 5V                        | 1,2,3    | -               | TBD  | 10   | -              | TBD  | 10   | uA    |
| ENABLE Voltage                 | V ENABLE Going Down                  | 1,2,3    | -               | TBD  | 0.9  | -              | TBD  | 0.9  | V     |
| ENABLE Voltage                 | V ENABLE Going Up                    | 1,2,3    | 1.7             | TBD  | -    | 1.7            | TBD  | -    | V     |
| PROTECTION FEATURES            |                                      |          |                 |      |      |                |      |      |       |
| Short-Circuit Current          | VIN = +5V  (1)                       | 1        | 300             | 350  | 400  | 300            | 350  | 400  | mA    |
| Over Temperature Protection    | -                                    | -        | TBD             | -    | -    | TBD            | -    | °C   |       |

#### NOTES:

Guaranteed by design but not tested. Typical parameters are representative of actual device performance but are for reference only.
Military grade devices ("H" suffix) shall be 100% tested to subgroups 1,2 and 3.
Subgroup 1 Tc = +25°C

 $Tc = +25^{\circ}C$  $Tc = 200^{\circ}C$ 

Subgroup 2  $Tc = -55 \circ C$ Subgroup 3

④ Industrial grade devices shall be tested 100% tested at 25°C only.
⑤ Continuous operation at or above absolute maximum ratings may adversely effect the device performance and/or life cycle.

#### **APPLICATION NOTES**

#### **PIN FUNCTION**

**VIN** - This pin provides the input power connection to the MSK5501.

**GND** - These pins provide the input and output ground reference.

**VOUT** - This pin is the output for the device.

**ENABLE** - When tied low, the MSK5501 is enabled and operates normally. When tied high, the MSK5501 is disabled.

#### INPUT AND OUTPUT POWER SUPPLY BYPASSING

The MSK5501 has an internal output capacitor, which in most cases, is sufficient to stabilize the internal control loop. Additional capacitance can be added, and improves load transient response. Although not required, a  $0.047\mu$ F ceramic capacitor connected between VIN and GND, can be used to maximize transient response and minimize power supply transients.

#### THERMAL LIMITING

TBD

#### **OVER CURRENT PROTECTION**

The MSK5501 has an internal current limiting feature. The typical current limit threshold is 350mA. During an over current event, the output voltage with be reduced linearly until the over current state ends.


### **ENABLE** FUNCTION

When the enable pin is tied low (< 0.9V), the MSK5501 is enabled and operates normally. When the enable pin is tied high (> 1.7V), the MSK5501 is disabled and VOUT is floating. Should the output voltage rise above VIN, or VIN drop below the output voltage, an internal back diode will conduct reverse current. Supply current, when disabled, is typically  $1\mu$ A.


# **TYPICAL PERFORMANCE CURVES**

TBD

# MECHANICAL SPECIFICATIONS

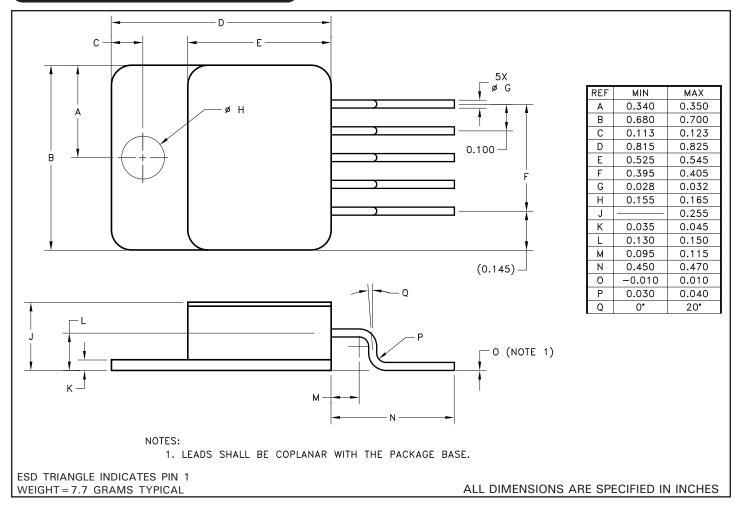


# ORDERING INFORMATION

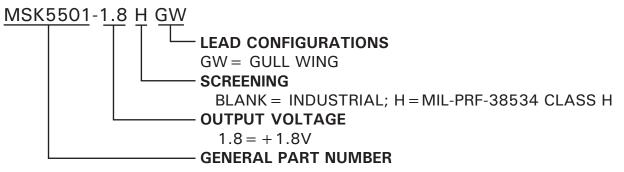

The above example is a +1.8, Class H regulator with gull wing leads.

#### MECHANICAL SPECIFICATIONS

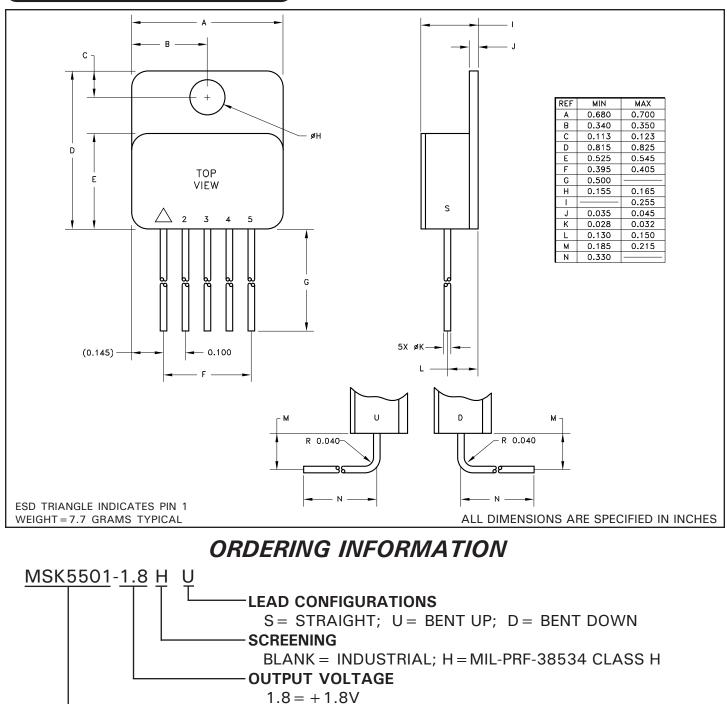

GENERAL PART NUMBER

The above example is a +1.8V, Class H regulator with leads bent up.

## **REVISION HISTORY**

| REV | STATUS      | DATE  | DESCRIPTION     |
|-----|-------------|-------|-----------------|
| -   | Preliminary | 09/14 | Initial Release |

M.S. Kennedy Corp. Phone (315) 701-6751 FAX (315) 701-6752 www.mskennedy.com

The information contained herein is believed to be accurate at the time of printing. MSK reserves the right to make changes to its products or specifications without notice, however, and assumes no liability for the use of its products. Please visit our website for the most recent revision of this datasheet.